


Parts List:

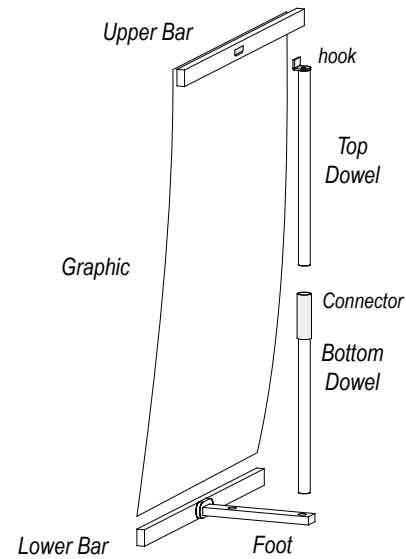


BACK VIEW

Item	Qty.	Description
--	1	31.5"w Lower Bar
--	2	15.375" Foot
--	2	2-piece Dowel
--	1	31.5"w Upper Bar
--	1	Graphic
--	1	Canvas bag

**Retain all packing materials.
DO NOT DISCARD.**



Assembly:

- ① Insert foot into lower bar.

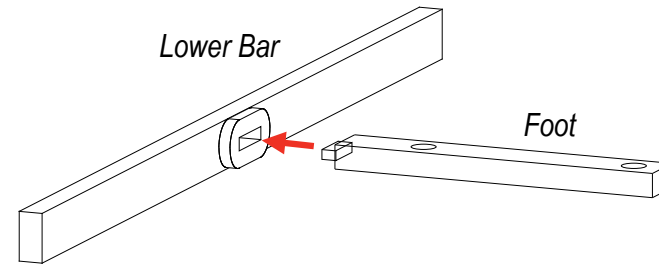


BACK VIEW

- ② Connect top & bottom dowels, then insert bottom dowel into foot.

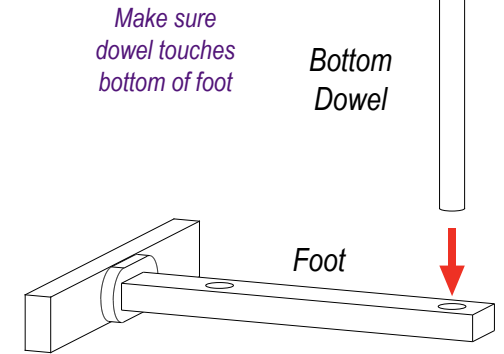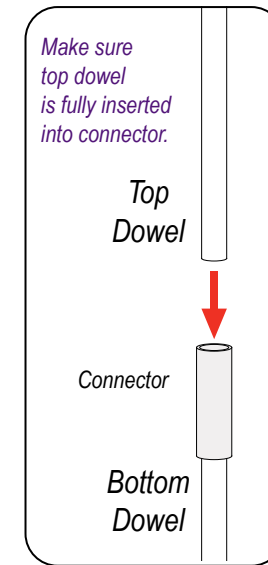

BACK VIEW


- ③ Unroll graphic from upper bar. Lift up bar, then hook top dowel into slot on back of upper bar.

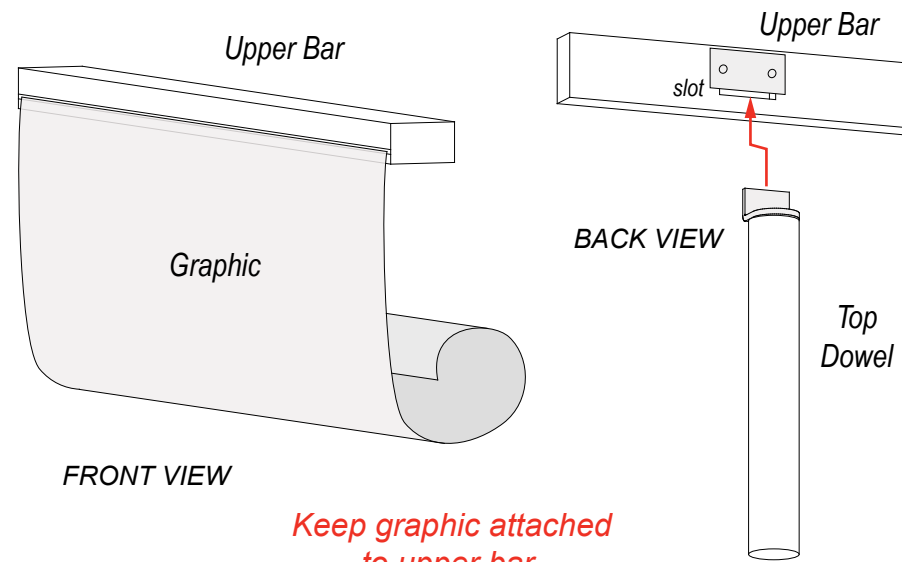

FRONT VIEW

BACK VIEW

- ④ Attach the graphic to groove on lower bar.

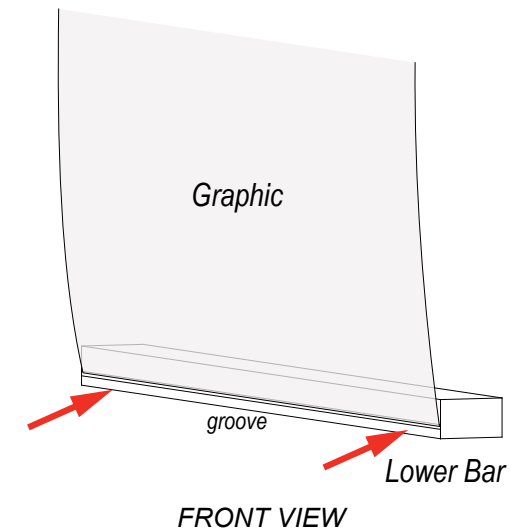

FRONT VIEW

Graphic Installation



Starting at one end of lower bar, insert silicone welt on back of graphic into the front channel.

Fully press the silicone welt into the channel, moving across the lower bar from end to end.

Once the welt is fully inserted, smooth out as needed.



FRONT VIEW

Assembled banner stand



BACK VIEW



Keep parts in fabric bag provided.

Disassembly:

- 1) Remove bottom silicone welt from groove of lower bar.
- 2) Roll the graphic around upper bar, print side out.
- 3) Detach feet from lower bar & remove dowels.

SETUP INSTRUCTIONS